



6434.**
6.3 (.250) TYPE SERIES · MALES FOR CONNECTOR



Specification Standard Terminals

Typology With dimple hole

Tongue thickness (mm) 6,3x0,8

Din 46343

Wire size mm² (AWG) 1-2,5 (18-14)

Ø Insulation (mm) 3-4,3

Materials, temperature and contact resistance

Part nr.	Material	Finishing	Max. Temp. (°C)
6434.00	Brass	Natural	110
6434.01	Brass	Pre-tin-plated	120
6434.02	Brass	Tin plated	120
6434.03	Brass	Silver-plated	130
6434.30	Bronze	Natural	120
6434.31	Bronze	Pre-tin-plated	130

Material thickness (mm) 0,4


Max. rated current

Wire section	6434.00 / 01 / 02 / 03 / 30 / 31
1.00 mm ²	12
1.50 mm ²	16
2.50 mm ²	20

Application tool MN6432

Wire strip length 5.5 (±0.5) mm

Crimping parameters & pull out force

Wire section (±10%)	Conductor 		Insulator	Pull-out force (N)
	Height (mm)	Width (mm)		
1.00 mm ²	1.65 (±0.05)	2.86 (±0.05)	4.00 (±0.10)	108N @ 60s
1.50 mm ²	1.75 (±0.05)	2.87 (±0.05)	4.00 (±0.10)	150N @ 60s
2.00 mm ²	1.90 (±0.05)	2.88 (±0.05)	4.00 (±0.10)	150N @ 60s
2.50 mm ²	2.00 (±0.05)	2.90 (±0.05)	4.00 (±0.10)	230N @ 60s

Values only valid for the application tool specified upwards. The insulator widths are only indicative as they are dependent on the sheath thickness of the wire used.

Winding number 5000

Compatible connectors 26341**, 26342**, 26343**, 26344**, 26346**, 26348**, 26373**, 26376**, 26377**, 26379**, 26382**, 26383**

Approved regulations

Part nr.	Approval	Standard	File	Certified framework
6434.00	UL	UL 310	E211727	AWG 18-14 (16-41 Stranded Cu) / MN6434
6434.01	UL	UL 310	E211727	AWG 18-14 (16-41 Stranded Cu) / MN6434



6434.**




6.3 (.250) TYPE SERIES · MALES FOR CONNECTOR



Approvals



Drawing

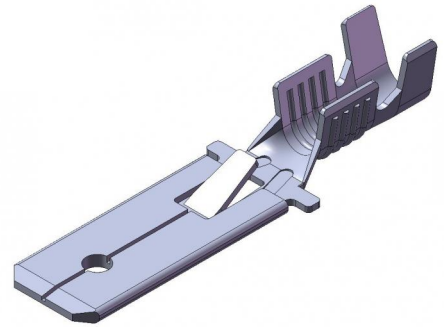

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A1	Datasheet generated automatically [A1]	2019-09-03	Laboratory Dept.	E. Roura

Especialitats Elèctriques Escubedo S.A.U. · Ctra. de Girona-Olot Km. 35,5 · 17843 Riudellots de la Creu · Girona · Spain
Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com