

8545.** UP-FIT SERIES - 4.20 MM UP-FIT CONNECTIONS



Specification 4.20 mm UP-FIT Female Terminals

Wire size mm² (AWG) 0,08-0,32 (22-28)

Ø Insulation (mm) 1-1,8

Counterpart 7545.**; 7546.**; 7547.**

Materials, temperature and contact resistance

Part nr.	Material	Finishing	Max. Temp. (°C)
8545.01	Brass	Pre-tin-plated	120
8545.31	Bronze	Pre-tin-plated	130

Material thickness (mm) 0,2



Insertion / Withdrawal forces

	8545.01 / 31
1st Insertion (max)	5N ¹
1st Withdrawal (min)	1N ¹

¹ Valid for UP-FIT Series

Application tool MN7545

Crimping parameters & pull out force

Wire section (±10%)	Conductor 		Insulator 	Pull-out force (N)
	Height (mm)	Width (mm)	Width (mm)	
22 AWG	0.84	1.26	1.65	36N @ 60s
24 AWG	0.80	1.25	1.65	22,3N @ 60s
26 AWG	0.75	1.26	1.65	13,4N @ 60s
28 AWG	0.70	1.23	1.65	≥ 12N

Values only valid for the application tool specified upwards. The insulator widths are only indicative as they are dependent on the sheath thickness of the wire used.

Winding number 9000

Compatible connectors 242M12**, 242M22**, 242M23**, 242M24**, 242M25**, 242M26**, 242M28**

Approved regulations

Part nr.	Approval	Standard	File	Certified framework
8545.01 ¹	UL	UL 1977	E223221	AWG 28-22 / MN8545 - MN7545
8545.31 ¹	UL	UL 1977	E223221	AWG 28-22 / MN8545 - MN7545

¹ Cat. No. meets with the standard UL1977 as a component of UP-FIT full connection system.

Rated current and voltage:
 2 and 4 poles - AWG 28 - 2A/600V (USR, CND)
 2 and 4 poles - AWG 26 - 3A/600V (USR, CND)
 2 and 4 poles - AWG 24 - 3A/600V (USR, CND)
 2 and 4 poles - AWG 22 - 4A/600V (USR, CND)
 6 poles - AWG 28 - 2A/600V (USR, CND)
 6 poles - AWG 26 - 2A/600V (USR, CND)
 6 poles - AWG 24 - 3A/600V (USR, CND)
 6 poles - AWG 22 - 3A/600V (USR, CND)
 8, 10, 12 and 16 poles - AWG 28 - 1A/600V (USR, CND)
 8, 10, 12 and 16 poles - AWG 26 - 1A/600V (USR, CND)
 8, 10, 12 and 16 poles - AWG 24 - 2A/600V (USR, CND)
 8, 10, 12 and 16 poles - AWG 22 - 3A/600V (USR, CND)



Approvals



8545.** UP-FIT SERIES · 4.20 MM UP-FIT CONNECTIONS



Drawing

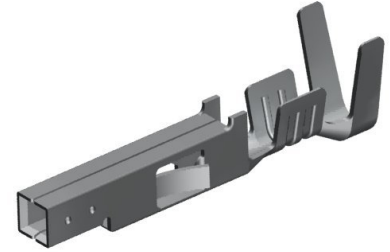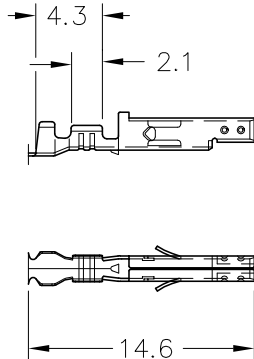

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A4	Change company name and logo	2021-10-21	Laboratory Dept.	E. Roura (Laboratory Dept.)
A3	Update insulation crimp specifications	2021-06-08	Laboratory Dept.	E. Roura (Laboratory Dept.)
A2	Update crimping insulation shape	2019-12-03	E.Roura (Laboratory Dept.)	M.Codina (Engineering Dept.)
A1	Datasheet generated automatically [A1]	2018-08-03	Laboratory Dept.	E. Roura